

# RMR-16-WP-PLED


Wet Location Semi-Recessed LED MR-16 Emergency Unit



Project:	
Type:	
Catalog #:	



## STANDARD



## OPTIONAL



## ILLUMINATION

- Two fully adjustable semi-recessed, round LED MR16 lamp heads for optimal light distribution
- Ultra-bright, energy efficient, long-life White LED lamps provide up to 76-ft center-to-center spacing with 3-ft path of egress at 7.5-ft mounting height.

## ELECTRICAL

- Dual 120/277 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- LVD (low voltage disconnect) prevents battery from deep discharge.
- 6V maintenance-free, rechargeable sealed lead acid battery.
- Internal solid-state transfer switch automatically connects the internal battery to lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

## MOUNTING

- Wall mount via knockouts on the back of the housing.

## HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in gray or black finish.
- Fully gasketed clear polycarbonate cover offers protection against wet, non-hazardous dust, corrosive atmospheres and to water spray or splashing water locations.


## OPTIONS

- CW: Optional internal heater and battery blanket for extreme cold temperature applications, (-25°C – 40°C).
- USA: Substantial transformation assembly in the U.S. complies with "Assembled in the USA" under the Buy American Act.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meets electrical and life safety codes.
- CEC: Certified to CEC under Title 20 Regulations

## WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for two years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for wet locations (20°C – 40°C).

## DIMENSIONS

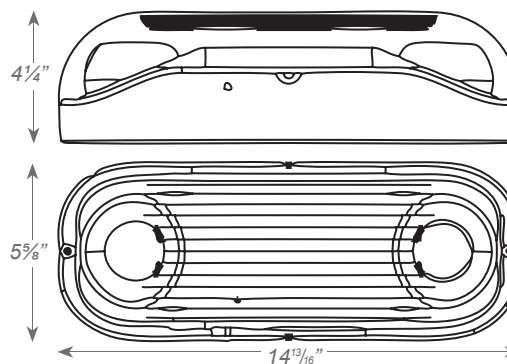

## ORDERING INFORMATION

Sample Part Number: RMR-16-WP-PLED

MODEL	HOUSING COLOR				LAMP	OPTIONS	
RMR-16	(blank)	Gray	WP	Wet Location	PLED	7.0W High Lumen White LED Lamps standard	CW Internal heater with battery blanket
	B	Black					USA Assembled in USA
							SDT Self-Diagnostics <sup>1</sup>
							CEC Certified to CEC under Title 20 Regulations

<sup>1</sup> Not available with CEC option

# RMR-16-WP-PLED

Wet Location Semi-Recessed LED  
MR-16 Emergency Unit



<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	277V	120V	277V
RMR-16-WP-PLED	6.0	6.2	0.053	0.025
RMR-16-WP-CW-PLED	5.3	6.0	0.050	0.025
RMR-16-WP-SDT-PLED	5.5	6.7	0.050	0.030
RMR-16-WP-SDT-CW-PLED	5.5	6.7	0.050	0.030