


# RMCLPU Running Man Lightpipe LED Exit Sign & Emergency Combo



<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	

## STANDARD



## OPTIONAL



## ILLUMINATION

- Ultra bright, energy efficient white LED emergency lighting.
- 4.5W (36 LEDs x 0.125 watts) per light pipe.
- Adjustable high performance, smooth, chrome-plated, metallized reflector and acrylic, UV-stabilized "light pipe" lens for optimal light distribution.
- Ultra bright, energy efficient, long lasting white LED provides even, fully illuminated panel.

## ELECTRICAL

- Dual 120/347 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 4.8V long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board/light pipe for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.
- Remote capable standard.

## MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.
- Field selectable, universal directional indication provided with three (Right, Left and No Arrow) pictogram legends.

## HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finishes.


## OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.

## WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- CSA listed for damp locations (0°C – 50°C).
- Meets or exceeds CSA C22.2 No. 141.10 standard requirements for Emergency lighting equipment.

## DIMENSIONS

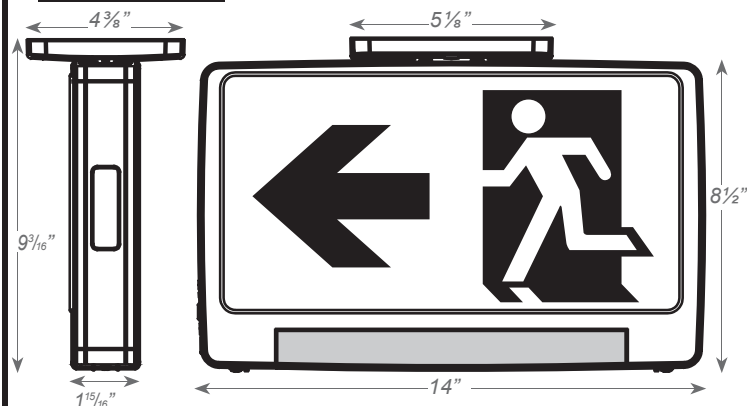

## ORDERING INFORMATION

Sample Part Number: **RMCLPU-2-W-RC**

MODEL	No. of FACES	HOUSING COLOR	OPTIONS
RMCLPU	2 Universal Single/Double	W White	RC Remote Capable (standard)
		B Black	
			SDT Self-diagnostics

<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	347V	120V	347V
RMCLPU-RC	4.4	4.4	0.037	0.013

## REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY	REMOTE CAPACITY	COMPATIBLE REMOTE HEAD FAMILY												
			RHLED			RH16LED	RH16		RH		RHR		SRH		SRHLED
			3.6V	9.6V	MV		6V	12V	6V	12V	6V	12V	6V	12V	
RMCLPU	9.6V	3W		X	X										