CEMXTE Remote Capable Thermoplastic Exit Sign



Project:	
Туре:	
Catalog #:	

STANDARD

OPTIONAL





ILLUMINATION

• Ultra-bright, energy efficient, long-life Red or Green LED EXIT sign illumination.

ELECTRICAL

- Dual 120/277 voltage.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- Charge rate/power "ON" LED indicator light and push-totest switch for mandated code compliance testing.
- 3.6V long life, maintenance-free, rechargeable NiCd battery.
- 5.5W of remote capacity standard.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and connected LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- Mounting canopy included for top or end mount.
- Universal knockout pattern on back plate for wall mount.

HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.
- Snap-out Chevron directional indicators.

ORDERING INFORMATION


OPTIONS

SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage

WARRANTY / LISTING

- Five-year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- UL Listed for damp locations (0°C 50°C).
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

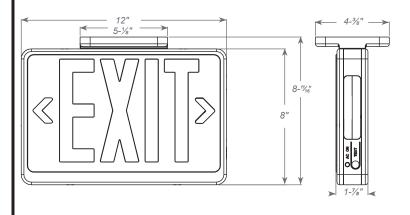

Sample Part Number: CEMXTERW

MODEL	No. of FACES	LE	TTER COLOR	HOU	ISING COLOR		OPTIONS	
CEMXTE	Universal Single/	R	Red	W	White	SDT	Self-Diagnostics	
	Double Face	G	Green	В	Black			



Project:	
Туре:	
Catalog #:	

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT W	ATTS (W)	INPUT AMPS (A)		
	120V	277V	120V	277V	
CEMXTE RED/GREEN	1.2	1.2	0.12	0.11	
CEMXTE RED SDT	3.0	3.0	0.36	0.36	
CEMXTE GREEN SDT	3.0	3.0	0.34	0.34	

REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY	REMOTE	COMPA	TIBLE RE	MOTE HE	AD FAMILY
		CAPACITY	RHLED	MRHLED	RH16LED	SRHLED
CEMXTE	3.6V	5.5W	х	х		