EU Remote Capable Compact Thermoplastic Exit Sign



Project:	
Type:	
Catalog #:	

STANDARD















ILLUMINATION

Long-lasting, energy efficient Red or Green LED EXIT sign illumination

ELECTRICAL

- Dual 120V/277 voltage standard. Optional dual 120V/230V available.
- Unique bi-color LED indicator light alerts occupant on battery condition (Green-normal, Red-check battery).
- 3.6V long life, maintenance-free, rechargeable Ni-Cd battery.
- 3.0W of remote capacity standard
- Internal solid-state transfer switch automatically connects the internal battery to LED board and connected LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

MOUNTING

- EZ-snap thermoplastic mounting canopy included provides top or end mount.
- Universal K/O pattern on back plate for wall mount.

HOUSING

Injection-molded, engineering grade, 5VA flame retardant, high-impact, thermoplastic in white or black finish.


OPTIONS

- SPV: UL Listed for special voltage option.
- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes. Universal 120-277 voltage.

WARRANTY / LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- UL Listed for damp locations (0°C 40°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- Certified to CEC under Title 20 Regulations.

DIMENSIONS

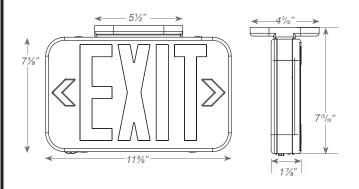

Sample Part Number: CEXTEU3RW

ORDERING INFORMATION

MODEL		No. of FACES	LETTE	R COLOR	HOUSIN	G COLOR		OPTIONS
CEXTEU	3	Universal Single/Double	R	Red	W	White	SDT	Self-Diagnostics ¹
		Face	G	Green	В	Black	SPV	120/230 Volt 50/60Hz ¹
			RG	Red/Green				

¹ Not available with RG units

NOTES:

CEXTEU Remote Capable Compact Thermoplastic Exit Sign



Project:	
Type:	
Catalog #:	

ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)			INPUT AMPS (A)			
	120V	230V	277V	120V	230V	277V	
CEXTEU RG	1.2	N/A	1.2	0.12	N/A	0.12	
CEXTEU RED/GREEN	1.2	1.2	1.2	0.12	0.12	0.12	
CEXTEU RED SDT	3.0	3.0	3.0	0.05	0.05	0.05	
CEXTEU GREEN SDT	2.7	2.7	2.7	0.05	0.05	0.05	

REMOTE LAMP COMPATIBILITY

MODEL NUMBER	BATTERY		COMPATIBLE REMOTE HEAD FAMIL				
		CAPACITY	RHLED	MRHLED	RH16LED	SRHLED	
CEXTEU	3.6V	3.0W	Х	х			