

|                   |  |
|-------------------|--|
| <b>Project:</b>   |  |
| <b>Type:</b>      |  |
| <b>Catalog #:</b> |  |

## STANDARD



## ILLUMINATION

- Ultra-bright, energy efficient, long-life White LED adjustable lamp heads provide up to 100-ft center-to-center spacing with a 6-ft path of egress at 15-ft mounting height.
- 6.0 watt (12 LEDs x 0.50 watt) per head.
- Adjustable glare-free PAR-Type lamp heads with all-inclusive lamp, reflector and lens assembly.

## ELECTRICAL

- Powered from low voltage (5-15VDC) power source with low voltage wiring (not provided).

## MOUNTING

- Universal mounting adapter plate included. Mounts to single-gang switch box.
- Distance of maximum run is determined by system voltage, wire gauge and total maximum wattage on the run.
- Suitable for wall or ceiling mount.


## HOUSING

- Available in engineering grade, Impact-resistant thermoplastic housing in standard white or black finish.

## WARRANTY / LISTING

- Five year warranty.
- UL Listed for damp locations (0°C – 50°C).
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.

## DIMENSIONS

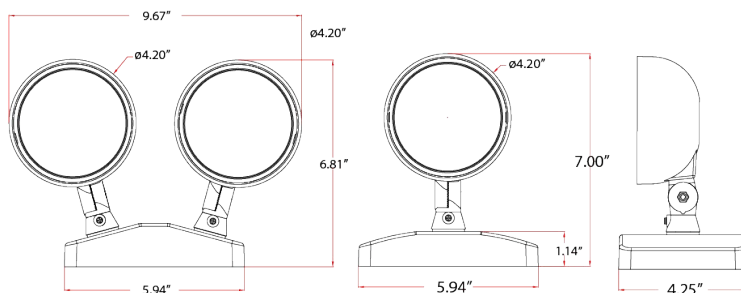

## FIXTURE COMPATIBILITY LIST

Reference individual unit equipment specification sheets for remote load capacity availability.

| BEST LIGHTING MODEL TYPE |             |               |
|--------------------------|-------------|---------------|
| CALEDCXTE-RC             | CWLEZXTE-RC | INDCWLEZ      |
| HLCWLEZ                  | LEDSDXR627  | HLEMR         |
| INDEMR                   | NYDXR       | RMR-16-65/125 |
| LEDXR                    |             |               |

## ORDERING INFORMATION

Sample Part Number: **HPRL1**

| MODEL | No. of HEADS  | COLOR   |       |
|-------|---------------|---------|-------|
| HPRL  | 1 Single Head | (blank) | White |
|       | 2 Double Head | B       | Black |