

# **FEATURES**

- Input =120-277V, 50-60Hz
- Standby power = 0.6W
- Max current = 3A
- Rated for indoor use only
- MAX range = 100ft

### **ORDERING INFORMATION**

MODEL	DESCRIPTION
PPA102S	BLUETOOTH CONTROL MODULE

## **APP SET UP**





Keilton iOS

Keilton Android @GooglePlay



Control Individual Lights




Set Lighting Groups




Set Schedules and Scenes



### **LINE DRAWING**



### **WIRING SCHEMATIC**

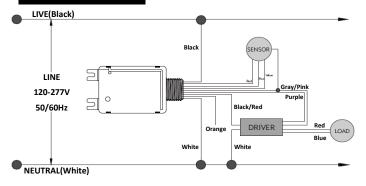

Housing mounts into standard  $\frac{1}{2}$ " knockout on lighting fixture or junction box. Wire feed through knockout for connection inside lighting fixture or junction box.