

# RMEZXTEU Running Man LED Exit Sign



<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	



## STANDARD



## OPTIONAL

### ILLUMINATION

- Ultra bright, energy efficient, long-lasting white LED provides even, fully illuminated panel.

### ELECTRICAL

- Dual 120/347 voltage.
- Charge rate/power "ON" LED indicator light and push-to-test switch for mandated code compliance testing.
- 9.6V Long life, maintenance-free, rechargeable NiCd battery.
- Internal solid-state transfer switch automatically connects the internal battery to LED board and LED lamp heads for minimum 90-minute emergency illumination.
- Fully automatic solid-state, two rate charger initiates battery charging to recharge a discharged battery in 24 hours.

### MOUNTING

- EZ-snap mounting canopy included for top or end mount.
- Universal K/O pattern on back plate for wall mount.
- Field selectable, universal directional indication provided with three (Left, Right and No Arrow) pictogram legends.

### HOUSING

- Injection-molded, engineering grade, 5VA flame retardant, high-impact resistant, thermoplastic in white or black finish.


### OPTIONS

- SDT: Self-diagnostic feature performs monthly, biannual, and annual tests to ensure reliable operation and meet electrical and life safety codes.

### WARRANTY/LISTING

- Five year warranty on all electronics and housing. Battery prorated for five years.
- Meets UL924, NFPA 101 Life Safety Code, NEC, OSHA, Local and State Codes.
- CSA listed for damp locations (0°C – 50°C).
- Meets or exceeds CSA C22.2 No. 141.10 standard requirements for Emergency lighting equipment.

### DIMENSIONS

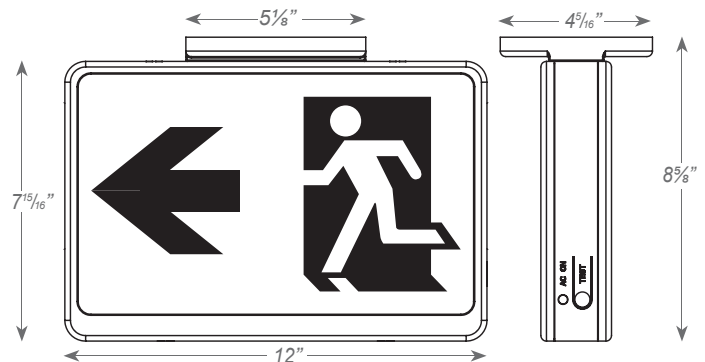

### ORDERING INFORMATION

Sample Part Number: **RMEZXTEU-2-W**

MODEL	No. of FACES	HOUSING COLOR	BATTERY	OPTIONS
RMEZXTEU	2 Universal Single/ Double Face	W White	BLANK AC	SDT Self-diagnostics
		B Black	EM Battery Backup	

<b>Project:</b>	
<b>Type:</b>	
<b>Catalog #:</b>	

## ELECTRICAL INFORMATION

CATALOG NUMBER	INPUT WATTS (W)		INPUT AMPS (A)	
	120V	347V	120V	347V
RMEZXTE	4.4	4.4	0.037	0.013